




a range of high % open area meshes suitable for many RFI & EMS applications in corrosion resistant 316 Stainless

<b>S316-EMS RFI</b>	<b>200</b>	<b>300</b>	<b>550</b>	<b>870</b>	<b>1300</b>
Free Area	60.8	62.5	68.8	67.3	72.5 %
Wire Diameter	0.056	0.076	0.114	0.190	0.236 mm
Nominal Aperture	198	287	554	868	1352 micron
Weave Type	plain				
Weight, kg per m2	0.16	0.20	0.25	0.43	0.44

Typical Composition

Nickel	10-14%
Chrome	16-18%
Molybdenum	2-3.0%

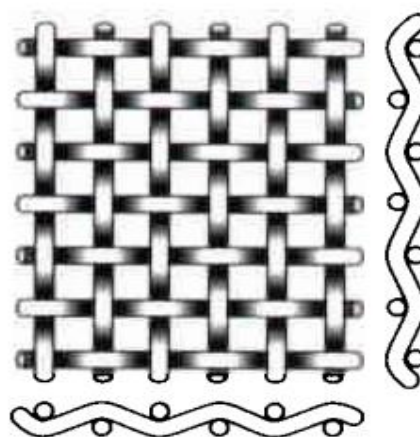

Available Formats - please ask for options not listed below

- Rolls ✓ up to 1220 mm wide
- Pieces ✓
- Circles ✓
- Panels ✓
- Strips ✓

**all information is provided in good faith - actual values may vary according to available stock and standard norms weights and measures are nominal values only**

contact [sales@unitedwire.com](mailto:sales@unitedwire.com)  
 visit [www.unitedwire.com](http://www.unitedwire.com)  
 call (+44) (0)131 552 6241

United Wire • Granton Park Avenue • Granton • Edinburgh • EH5 1HT • UK

Tel: +44 131 552 6241 · Fax: +44 131 552 8462 · Email: info@unitedwire.com · Website: www.unitedwire.com

United Wire is a business operated by M-I Drilling Fluids U.K. Limited

Registered office: Peregrine House, Peregrine Road, Westhill Business Park, Westhill, Aberdeenshire, Scotland, AB32 6JL

Registered in Scotland No. 161934

