



copper mesh, with excellent heat and electrical conductivity properties (RFI/EMS)

CSM-0250


Free Area
Wire Diameter
Nominal Aperture

Weave Type

Weight, kg per m2

Typical Composition
Copper

Plain Copper (99%)
38.7 %
0.160 mm
263 micron
plain
0.87
99% min

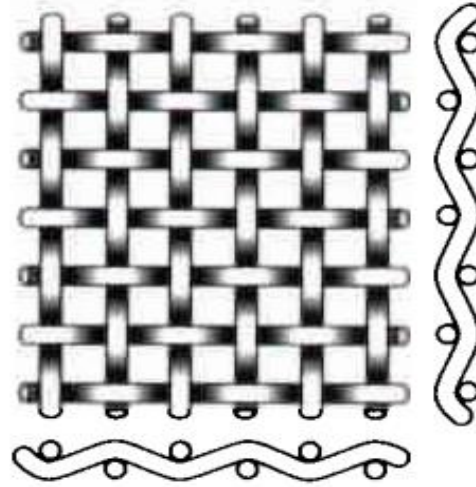

weave image

Available Formats

- please ask for options not listed below

- Rolls ✓ up to 1524 mm wide
- Pieces ✓
- Circles ✓
- Panels ✓
- Strips ✓

**all information is provided in good faith - actual values may vary according to available stock and standard norms
weights and measures are nominal values only**

contact sales@unitedwire.com
visit www.unitedwire.com
call (+44) (0)131 552 6241

United Wire • Granton Park Avenue • Granton • Edinburgh • EH5 1HT • UK

Tel: +44 131 552 6241 · Fax: +44 131 552 8462 · Email: info@unitedwire.com · Website: www.unitedwire.com

United Wire is a business operated by M-I Drilling Fluids U.K. Limited

Registered office: Peregrine House, Peregrine Road, Westhill Business Park, Westhill, Aberdeenshire, Scotland, AB32 6JL

Registered in Scotland No. 161934

