




a nickel-copper alloy with excellent corrosion resistance in a wide range of corrosive media

*\*Monel is a registered trademark of Special Metals*

<b>NA13-1000</b>	Alloy 400 2.4360
Free Area	51.3 %
Wire Diameter	0.400 mm
Nominal Aperture	1011 micron
Weave Type	plain
Weight, kg per m2	1.62
Typical Composition	
Nickel	63% min
Copper	28-34.0%
Iron	2.50% max
Carbon	0.30% max
Silicon	0.50% max
Manganese	2.00% max

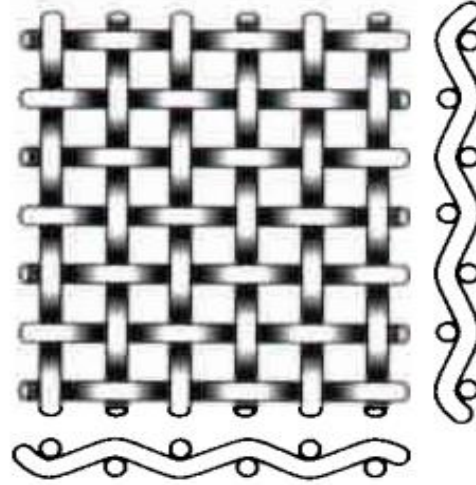

weave image

Available Formats - please ask for options not listed below

- Rolls ✓ up to 1500 mm wide
- Pieces ✓
- Circles ✓
- Panels ✓
- Strips ✓

**all information is provided in good faith - actual values may vary according to available stock and standard norms weights and measures are nominal values only**

contact [sales@unitedwire.com](mailto:sales@unitedwire.com)  
 visit [www.unitedwire.com](http://www.unitedwire.com)  
 call (+44) (0)131 552 6241

United Wire • Granton Park Avenue • Granton • Edinburgh • EH5 1HT • UK

Tel: +44 131 552 6241 · Fax: +44 131 552 8462 · Email: [info@unitedwire.com](mailto:info@unitedwire.com) · Website: [www.unitedwire.com](http://www.unitedwire.com)

United Wire is a business operated by M-I Drilling Fluids U.K. Limited

Registered office: Peregrine House, Peregrine Road, Westhill Business Park, Westhill, Aberdeenshire, Scotland, AB32 6JL

Registered in Scotland No. 161934

