




a range of wirecloths suitable for many safety applications in corrosion resistant 304 or 316 Stainless

SS-Fire & Heat Safety

	*28	**24	20	*10	4
Free Area	37.0	33.0	51.9	60.8	56.0 %
Wire Diameter	0.355	0.450	0.355	0.560	1.600 mm
Nominal Aperture	552	608	915	1980	4750 micron
examples of use	safety lamps	spark arrestor	fire guard (fine) plain	fire guard (coarse)	heat shield
Weave Type					
Weight, kg per m2	1.75	2.41	1.25	1.56	5.08
	* 304 only	**316 only			

Typical Composition

Nickel	8-14%
Chrome	16-20%
Molybdenum	2-3.0% 316 only

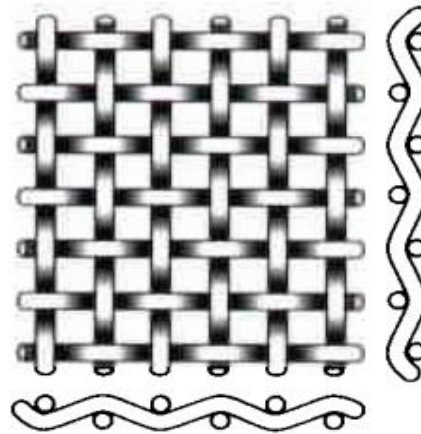

Available Formats

- please ask for options not listed below

- Rolls ✓ up to 1500 mm wide
- Pieces ✓
- Circles ✓
- Panels ✓ *special fabrications available*
- Strips ✓

all information is provided in good faith - actual values may vary according to available stock and standard norms weights and measures are nominal values only

examples of use for general information only, local conditions etc. may affect suitability of mesh in any application

contact sales@unitedwire.com
 visit www.unitedwire.com
 call (+44) (0)131 552 6241

United Wire • Granton Park Avenue • Granton • Edinburgh • EH5 1HT • UK

Tel: +44 131 552 6241 · Fax: +44 131 552 8462 · Email: info@unitedwire.com · Website: www.unitedwire.com

United Wire is a business operated by M-I Drilling Fluids U.K. Limited

Registered office: Peregrine House, Peregrine Road, Westhill Business Park, Westhill, Aberdeenshire, Scotland, AB32 6JL

Registered in Scotland No. 161934

